


AL UWL301 SM




BOAT SIZE : 7-25 mt. / 25-80 ft.

- The resistant toward salt water thanks to Aluminium Bronze body
- The High-Tech Power Led has high watt. Every LED is 5 Watt
- Every LED has 140-160Lumen
- RGBW full colour LED
- 8 mm Shockproof Tempered Glass
- 2x1,5 mm² Neopren RNF cable.
- Body assembly is practical. 20 mm cable hole is drilled on the surface of the hull and the surface of the boat is mounted underwater.

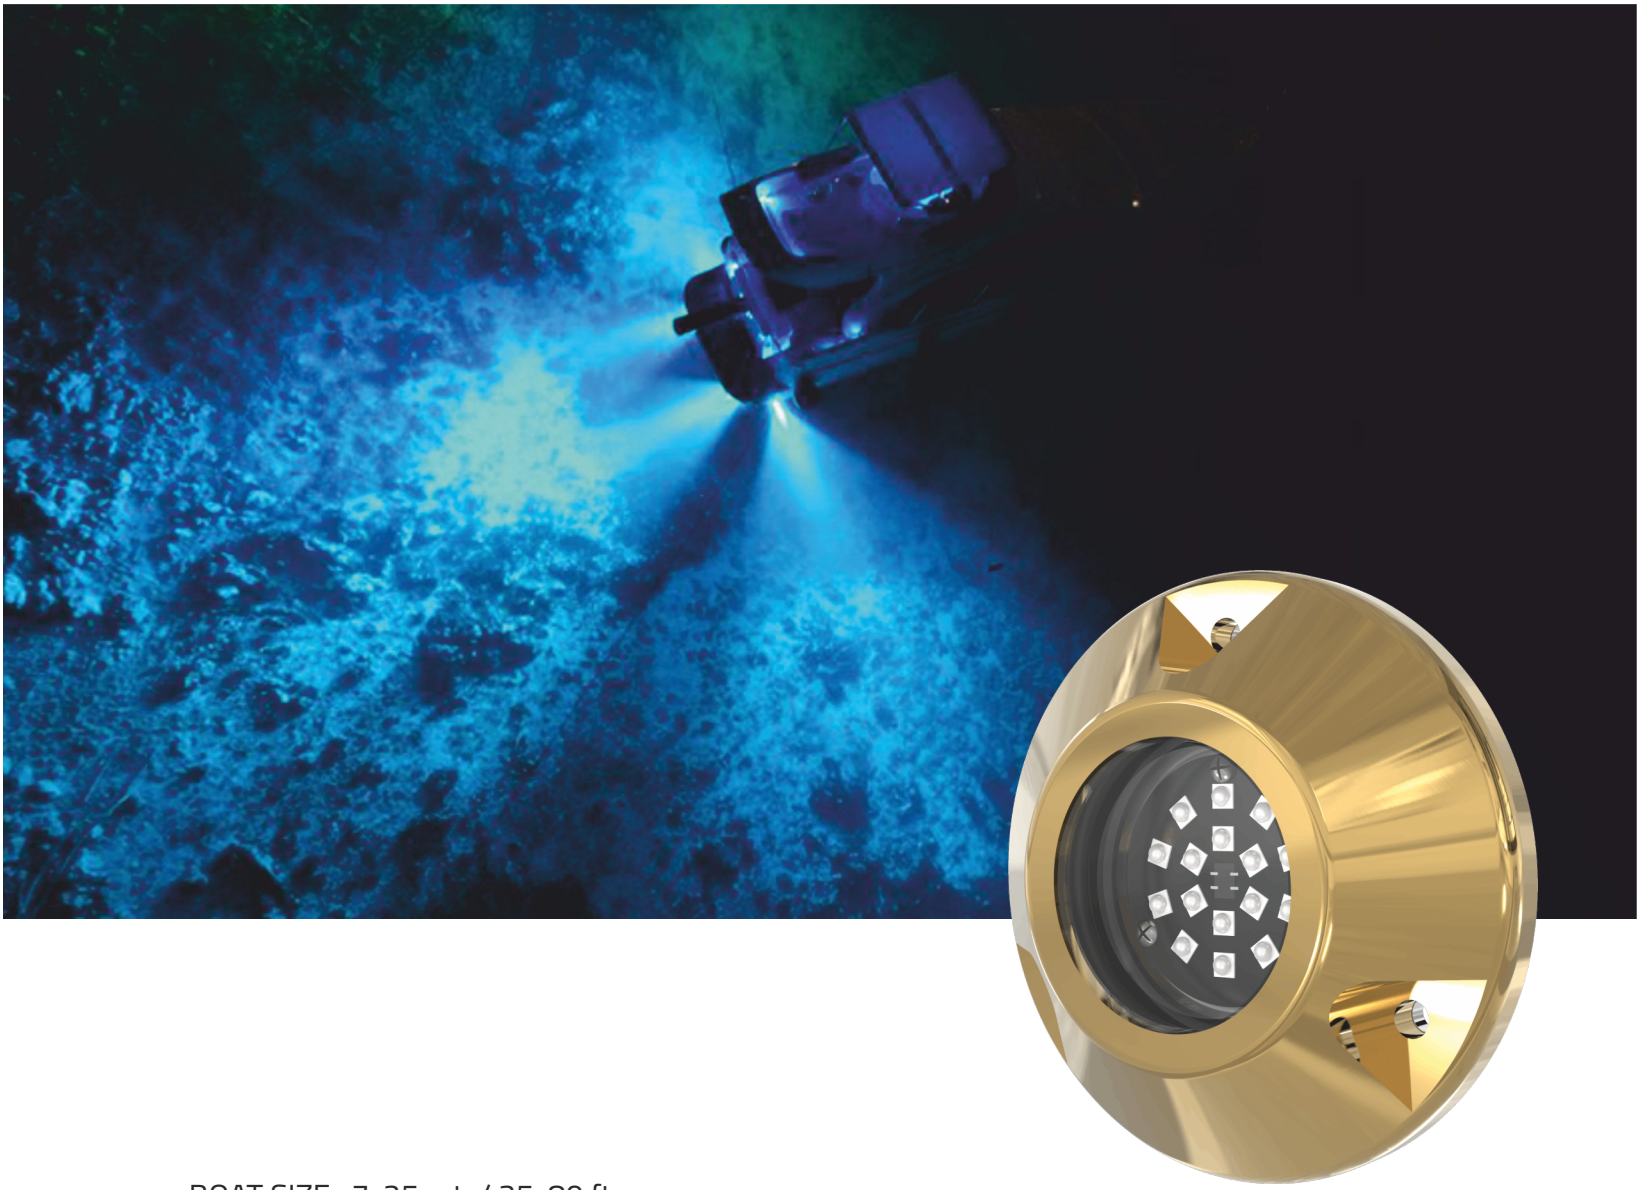

Product Specifications

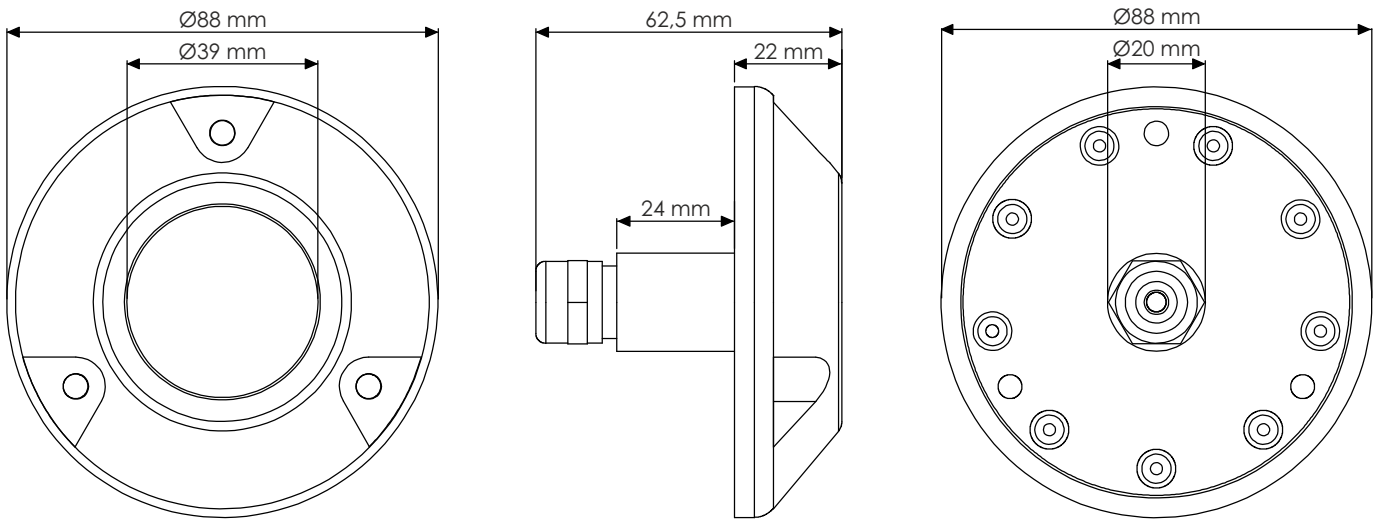

Product Code	AL UWL301 SM
Boat Dimensions mt./ft.	7mt. - 25mt. / 25ft. - 80ft.
Single Colour LED	White 16x5W & Royal Blue 16x3W 3535 High Power LED / LED Degree 110°
RGBW LED	RGBW 15x4W 3535 High Power LED / LED Degree 110°
Volt	DC10V-30V
Current 24V / 12V	3.0A / 6.0A
Watt	Single Colour 64W. - RGBW 60W.
Single Colour / Lumen	White 9000 lumen , Royal Blue 3360 lumen
RGBW Colour / Lumen	R: 750 lumen, G: 1800 lumen, B: 450 lumen, W: 2250 lumen, RGBW: 5250 lumen
IP Code	IP68 CLASS III
Body Material	Marine Aluminum Bronze Body, AISI 316L Stainless Steel Back Cover
Glass	8 mm. Special Tempered Glass
Product Cable	Single Colour 2 mt. 2x1,5 RNF Marine Cable , RGBW 2 mt. 5x1 RNF Marine Cable
Driver	External Constant Current Led Driver
Underwater Camera	Not applicable.
Product Sizes	Light Head Diameter: 88mm. , Head height: 22mm. , Full Length: 62,5mm. , Glass diameter: 39mm.
Hole Diameter	20mm.
Weight	690 gr.