

AL UWL301 TH




BOAT SIZE : 7-25 mt. / 25-80 ft.

- The resistant toward salt water thanks to Aluminium Bronze body
- Reinforced Aluminum replaceable inner core housing
- The High-Tech Power Led has high watt. Every LED is 5 Watt
- Every LED has 140-160Lumen
- RGBW full colour LED
- 8 mm Shockproof Tempered Glass
- 2x1,5 mm² Neopren RNF cable.
- No need to dismantle the entire product when changing LEDs
- Easy to replace by loosening the aluminum lighting capsule from inside the boat. The Aluminum Bronze body remains fixed on the boat.
- You can be connected AHD 2MP 1080P camera to the same housing optionelly.



Product Specifications

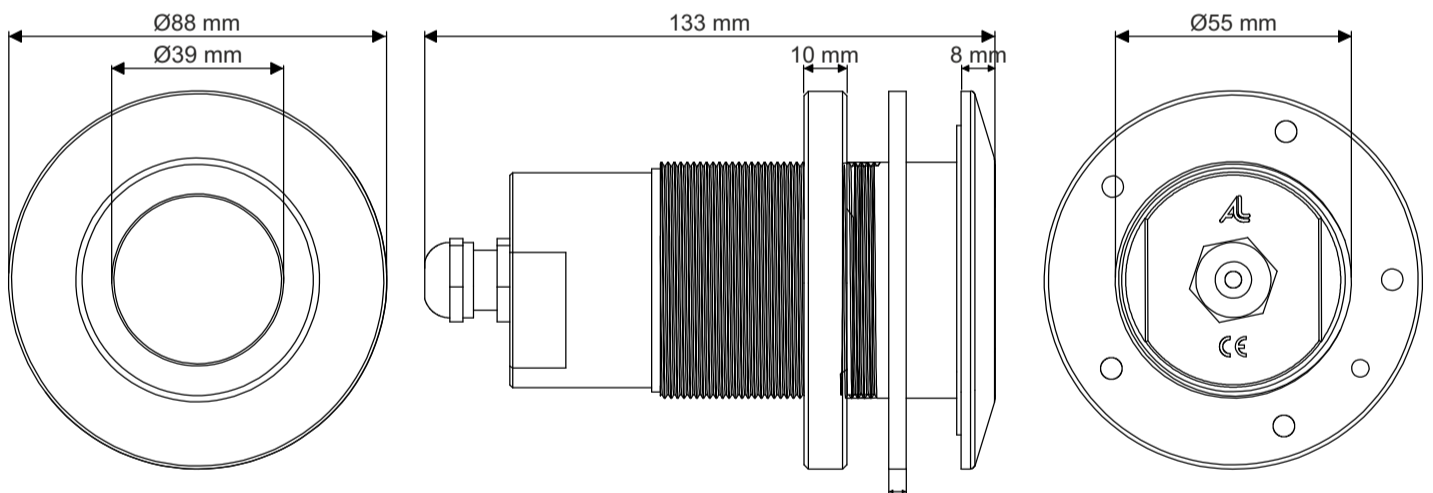

Product Code	AL UWL301 TH
Boat Dimensions mt./ft.	7mt. - 25mt. / 25ft. - 80ft.
Single Colour LED	White 16x5W & Royal Blue 16x3W 3535 High Power LED / LED Degree 110°
RGBW Led	RGBW 15x4W 3535 High Power LED / LED Degree 110°
Volt	DC10V-30V
Current 24V / 12V	3.0A / 6.0A
Watt	Single Colour 64W. - RGBW 60W.
Single Colour / Lumen	White 9000 lumen , Royal Blue 3360 lumen
RGBW Colour / Lumen	R: 750 lumen, G: 1800 lumen, B: 450 lumen, W: 2250 lumen, RGBW: 5250 lumen
IP Code	IP68 CLASS III
Body Material	Marine Aluminum Bronze Body, Marine Aluminum Led Core
Glass	8 mm. Special Tempered Glass
Product Cable	Single Colour 2 mt. 2x1,5 RNF Marine Cable , RGBW 2 mt. 5x1 RNF Marine Cable
Driver	Internal Constant Current Led Driver
Underwater Camera	Can be applied by modifying the core
Product Sizes	Light Head Diameter: 88mm. , Head height: 8mm. , Full Length: 133mm. , Glass diameter: 39mm.
Hole Diameter	55mm.
Weight	1,625 gr.

U.V. IP68 CLASS III

Do not use in waterless environment.