

AL UWL301 THS




BOAT SIZE : 7-25 mt. / 25-80 ft.

- The resistant toward salt water thanks to Aluminium Bronze body
- Reinforced Aluminum replaceable inner core housing
- The High-Tech Power Led has high watt. Every LED is 5 Watt
- Every LED has 140-160Lumen
- RGBW full colour LED
- 8 mm Shockproof Tempered Glass
- 2x1,5 mm² Neopren RNF cable.
- No need to dismantle the entire product when changing LEDs
- Easy to replace by loosening the aluminum lighting capsule from inside the boat.
The Aluminum Bronze body remains fixed on the boat.



Product Specifications

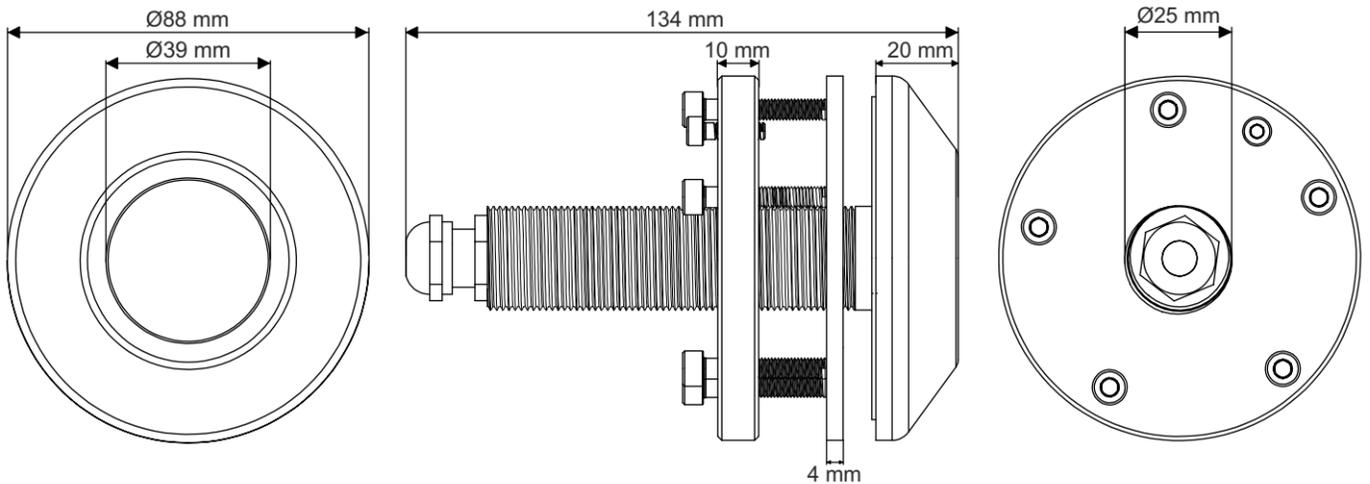

Product Code	AL UWL301 THS
Boat Dimensions mt./ft.	7mt. - 25mt. / 25ft. - 80ft.
Single Colour LED	White 16x5W & Royal Blue 16x3W 3535 High Power LED / LED Degree 110°
RGBW Led	RGBW 15x4W 3535 High Power LED / LED Degree 110°
Volt	DC10V-30V
Current 24V / 12V	3.0A / 6.0A
Watt	Single Colour 64W. - RGBW 60W.
Single Colour / Lumen	White 9000 lumen , Royal Blue 3360 lumen
RGBW Colour / Lumen	R: 750 lumen, G: 1800 lumen, B: 450 lumen, W: 2250 lumen, RGBW: 5250 lumen
IP Code	IP68 CLASS III
Body Material	Marine Aluminum Bronze Body, Marine Aluminum Led Core
Glass	8 mm. Special Tempered Glass
Product Cable	Single Colour 2 mt. 2x1,5 RNF Marine Cable , RGBW 2 mt. 5x1 RNF Marine Cable
Driver	Internal Constant Current Led Driver
Underwater Camera	Not applicable.
Product Sizes	Light Head Diameter: 88mm. , Head height: 20mm. , Full Length: 134mm. , Glass diameter: 39mm.
Hole Diameter	25mm.
Weight	1,225 gr.

U.V. IP68 CLASS III

Do not use in waterless environment.