


AL UWL302 THS




BOAT SIZE : 7-50 mt. / 25-165 ft.

- The resistant toward salt water thanks to Aluminium Bronze body
- Reinforced Aluminum replaceable inner core housing
- The High-Tech Power Led has high watt. Every LED is 5 Watt
- Every LED has 140-160Lumen
- RGBW full colour LED
- 8 mm Shockproof Tempered Glass
- 2x1,5 mm² Neopren RNF cable.
- No need to dismantle the entire product when changing LEDs
- Easy to replace by loosening the aluminum lighting capsule from inside the boat.
The Aluminum Bronze body remains fixed on the boat.

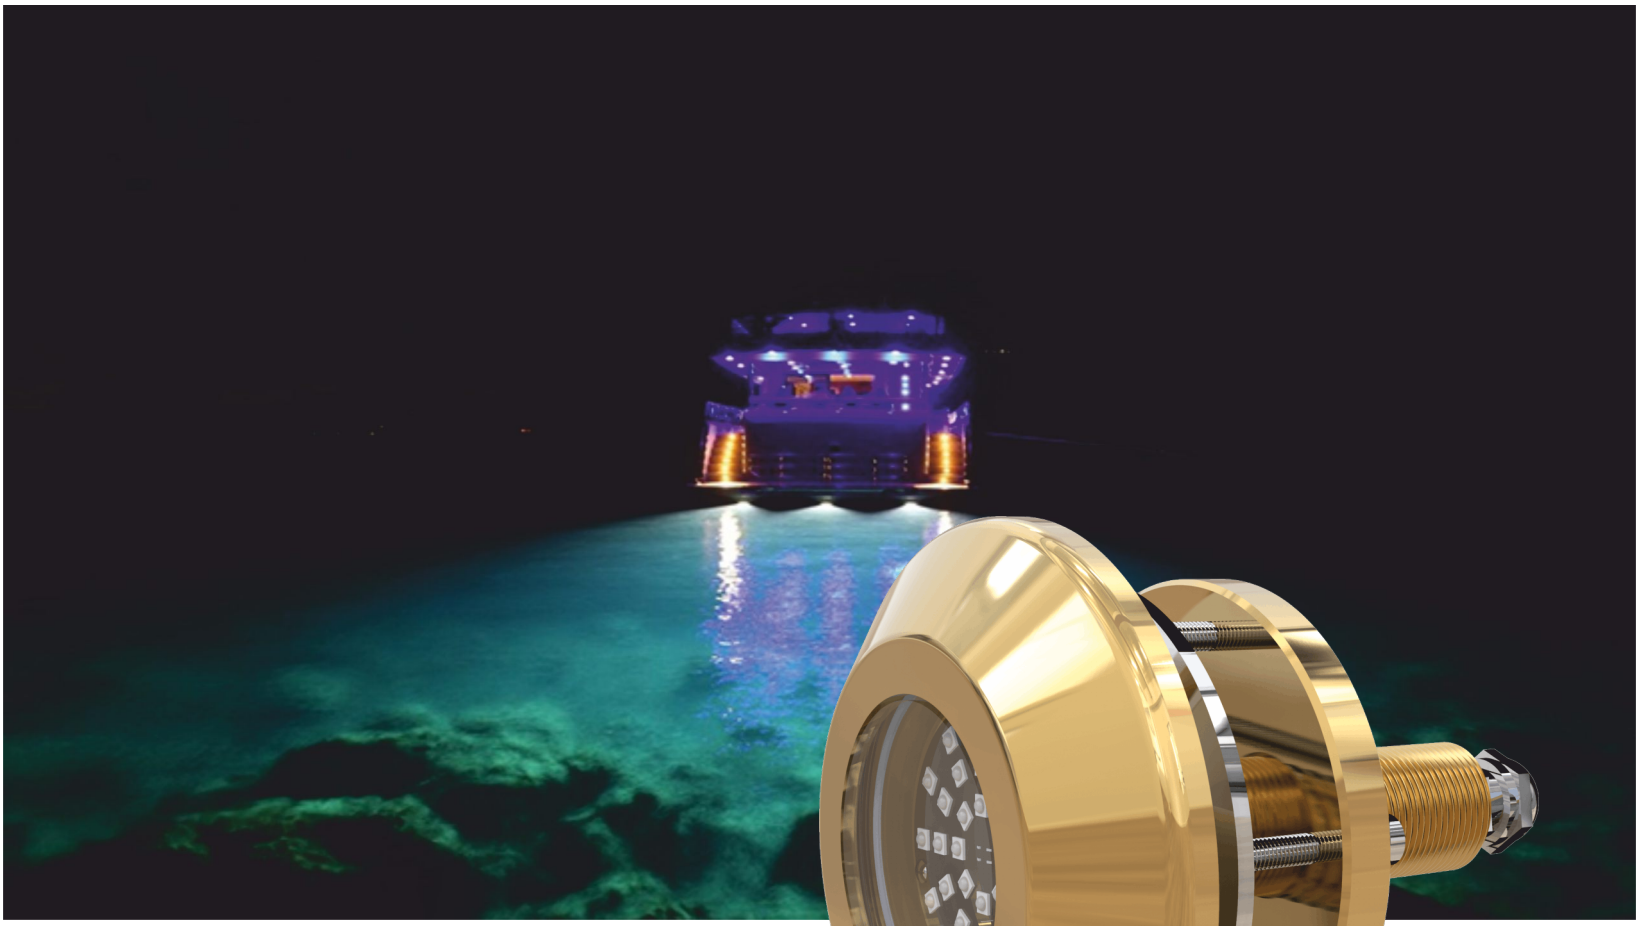

Product Specifications

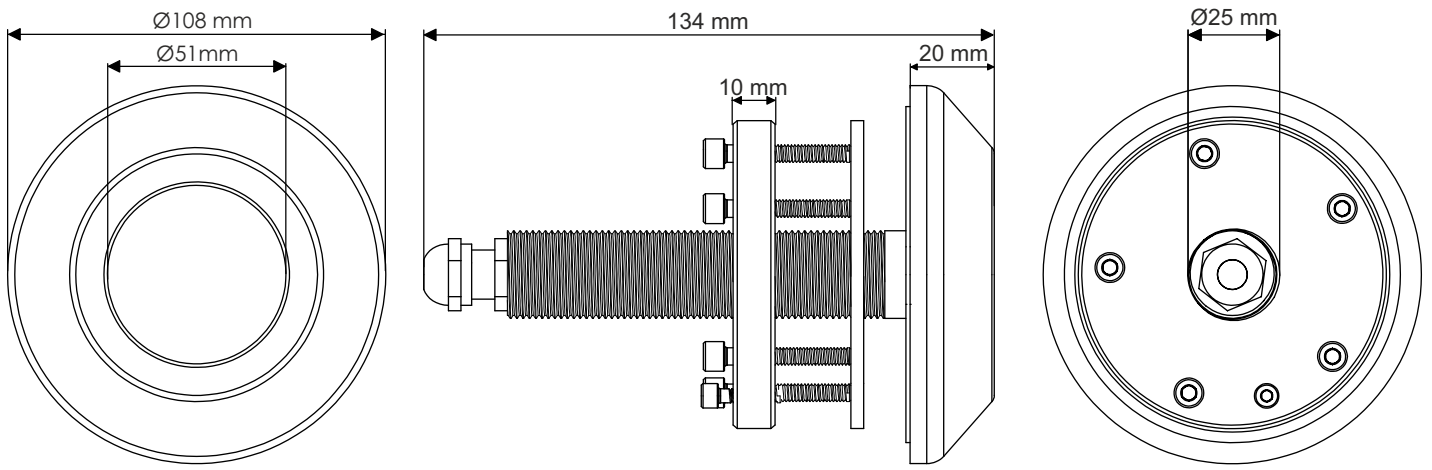

Product Code	AL UWL302 THS
Boat Dimensions mt./ft.	7mt. - 50mt. / 25ft. - 165ft.
Single Colour LED	White 32x5W & Royal Blue 32x3W 3535 High Power LED / LED Degree 110°
RGBW Led	RGBW 30x4W 3535 High Power LED / LED Degree 110°
Volt	DC10V-30V
Current 24V / 12V	5.4A / 10.8A
Watt	Single Colour 128W. - RGBW 120W.
Single Colour / Lumen	White 18000 lumen , Royal Blue 6720 lumen
RGBW Colour / Lumen	R: 1500 lumen, G: 3600 lumen, B: 900 lumen, W: 4500 lumen, RGBW: 10500 lumen
IP Code	IP68 CLASS III
Body Material	Marine Aluminum Bronze Body, Marine Aluminum Led Core
Glass	8 mm. Special Tempered Glass
Product Cable	Single Colour 2 mt. 2x1,5 RNF Marine Cable , RGBW 2 mt. 5x1 RNF Marine Cable
Driver	Internal Constant Current Led Driver
Underwater Camera	Not applicable.
Product Sizes	Light Head Diameter: 108mm., Head height: 20mm., Full Length: 134 mm., Glass Diameter: 51mm.
Hole Diameter	25mm.
Weight	1,970 gr.